

DelStar®

MADE IN CANADA

HD Brushless

Series 180

7"/180mm Hinge T1 Mount

The DelStar Series alternators are an integral charging system of an innovative brushless design. The compact, heavy duty construction, provides increased service life expected to match the longer maintenance intervals of today's engines, while providing a performance level without parallel.



Series 180

PRODUCT FEATURES

- **UNIQUE DUAL ROTOR BRUSHLESS CONSTRUCTION**

Extends the service life and increases durability by eliminating: Brushes, Slip Rings and the Rotating Winding.

- **HIGH OUTPUT DESIGN**

Producing more than 65% of its rated power at engine idle makes this an efficient alternator capable of handling the high electrical load demands at low alternator (rotor) RPM.

- **HIGH EFFICIENCY**

Means less engine power required for the electrical load, directly resulting in less fuel consumption.

- **LONG LIFE BEARINGS**

The 180 Series 7" Mount has been engineered for superior reliability. Featuring two 30mm High-Temperature, front ball bearings, capable of withstanding extreme belt loads and temperatures imposed by today's severe applications.

- **HIGH TEMPERATURES**

Designed to endure high temperature environments of 110°C / 230°F, or by allowing cooler outside air to flow directly into the alternator through the "Fresh Air Intake Cover" increases the operating limits to 125°C / 257°F.


AVAILABLE MODELS:

- 12 Volts 450 Amps, Negative or Insulated
- 24 Volts 265, 200 Amps, Negative or Insulated

APPLICATIONS:

- Coach & Transit Buses
- Emergency Vehicles
- Marine, Mining
- Construction, Industrial

PERFORMANCE CURVES

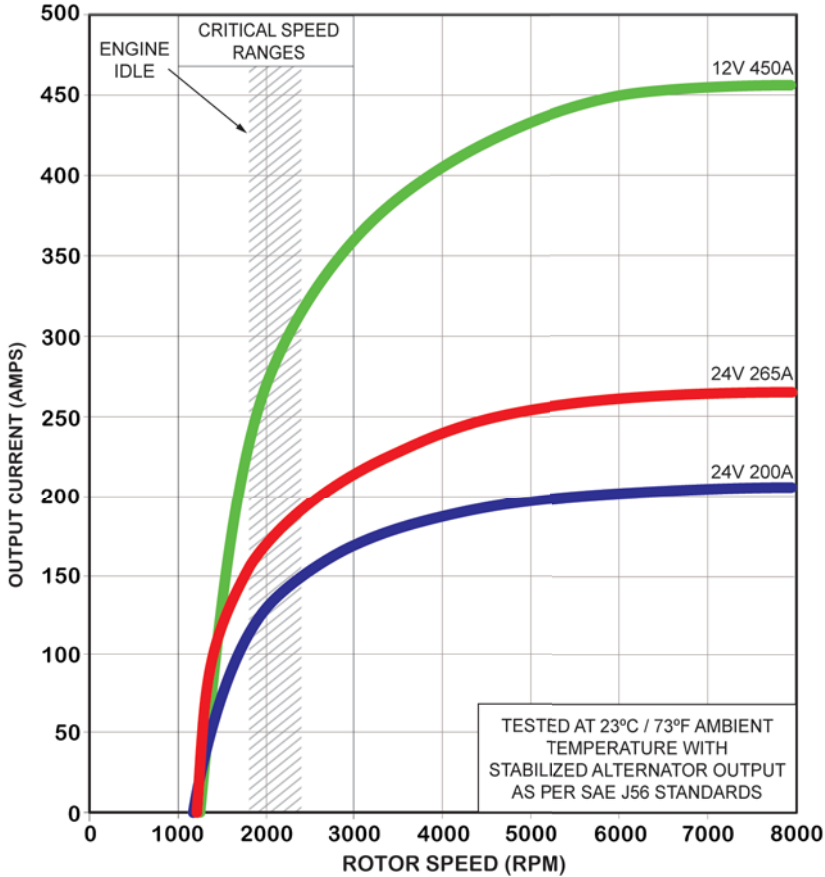

SPECIFICATIONS


- 7"/180mm hinge (T1) Mount
- Rotation: Bidirectional
- Internal Voltage Regulator
- Self-excited one wire connection
- Relay/AC terminal
- Indicator light terminal
- Sense terminal (Remote)
- Temperature limits:
 - Low -40°C / -40°F
 - High 110°C / 230°F
 - High 125°C / 257°F (with fresh air intake)
- Speed limits: 8,000 RPM continuous
9,000 RPM intermittent
- Weight: 51 Lbs. / 23 Kg.

CRITICAL SPEED RANGES


12V	450A	24V	265A	200A
RPM	AMPS	RPM	AMPS	AMPS
1800	220	1800	155	116
2000	270	2000	165	131
3000	359	3000	212	169
4000	406	4000	237	187
5000	434	5000	256	194
6000	450	6000	265	200




OUTLINE

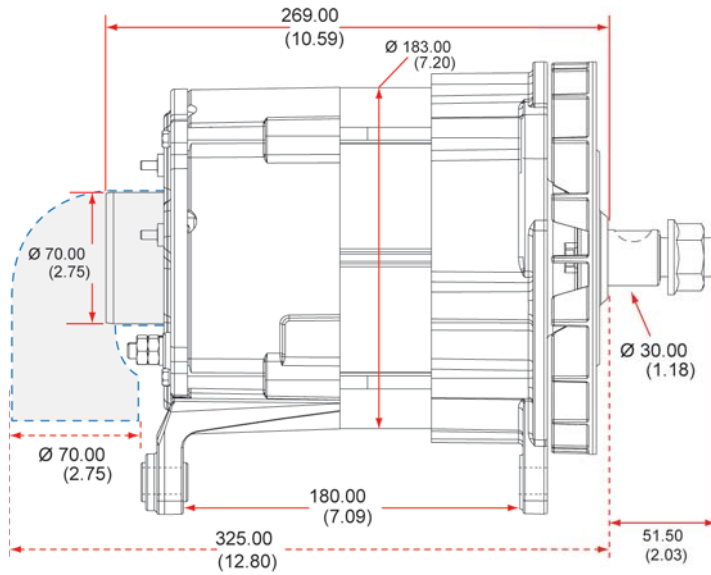

WIRING

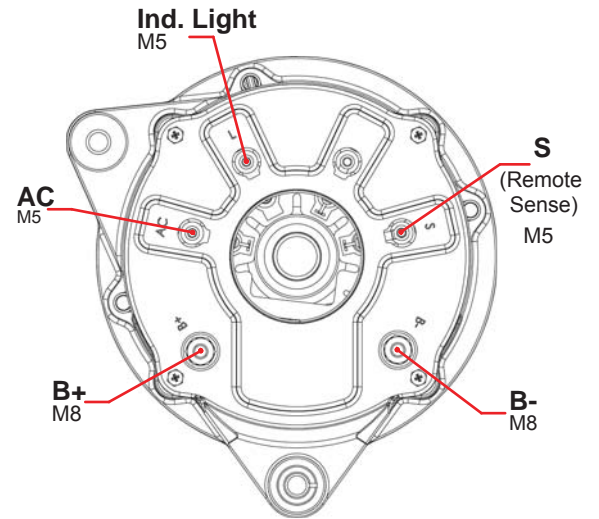


Dimensions are listed in mm over (in)

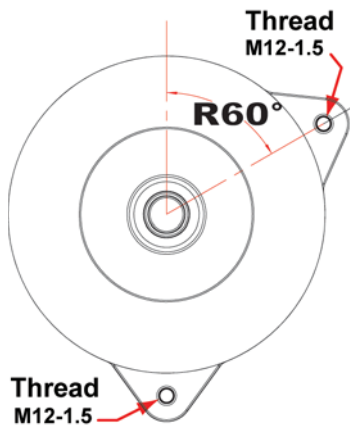


RIGHT 60°

R60° ALTERNATOR No.	Amps Output @ 2000/6000 rpm		
100-18121	12V	270 / 450A	
100-18225	24V	130 / 200A	Ins. Grd.
100-18227	24V	165 / 265A	Ins. Grd.

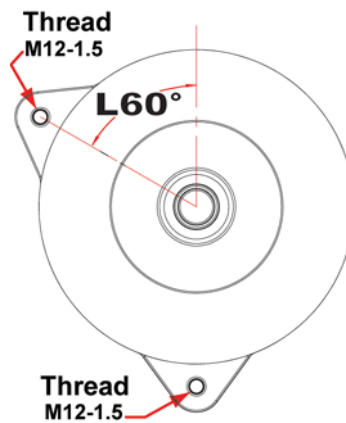

LEFT 60°

L60° ALTERNATOR No.	Amps Output @ 2000/6000 rpm		
100-18226	24V	130 / 200A	Ins. Grd.
100-18228	24V	165 / 265A	Ins. Grd.

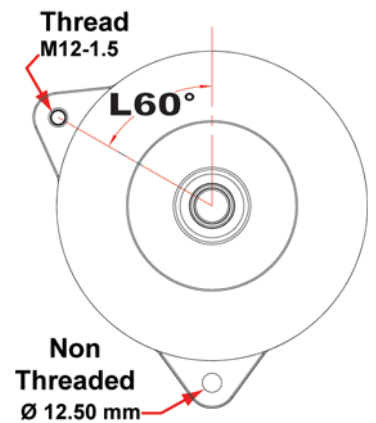

LEFT 60°

L60° ALTERNATOR No.	Amps Output @ 2000/6000 rpm		
100-18122	12V	270 / 450A	
100-18231	24V	130 / 200A	Ins. Grd.
100-18232	24V	165 / 265A	Ins. Grd.

COMPETITIVE INTERCHANGE

DELSTAR [™] Brushless			Bosch Brush Design		Delco Remy Brush Design		Prestolite Brush Design			
Mounting	180 Series (T1) Part No.	Amps Output @ 2000 / 6000 rpm	T1 Series Part No.	Amps Output @ 2000 / 6000 rpm	T1 Style Part No.	Amps Output @ 2000 / 6000 rpm	AC172 Series Sales No.	Amps Output @ 2000 / 6000 rpm		
	100-18221 24V 130 / 200A 100-18223 24V 165 / 265A		0 120 689 507	120 / 140A	19025333	120 / 140A	1277A720	115 / 155A		
			0 120 689 517							
			0 120 689 522							
			0 120 689 527							
			0 120 689 540							
			0 120 689 541							
0 120 689 542	150 / 180A Ins.	0 120 689 546								
0 120 689 567										
0 120 689 536										
0 120 689 544										
0 120 689 554										
0 120 689 589										
	100-18222 24V 130 / 200A 100-18224 24V 165 / 265A		0 120 689 503	120 / 140A	19025330	120 / 140A	1277A640	115 / 155A		
			0 120 689 508							
			0 120 689 512							
			0 120 689 513							
			0 120 689 520							
			0 120 689 530							
0 120 689 533	120 / 140A Ins.	0 120 689 535								
0 120 689 571										
0 120 689 534										
0 120 689 555										
0 120 689 558										
0 120 689 578										
	100-18229 24V 130 / 200A 100-18230 24V 165 / 265A		0 120 689 511	120 / 140A	19025331	120 / 140A	1277A680	115 / 155A		
			0 120 689 548							
			0 120 689 552							
			0 120 689 566							
			0 120 689 531						120 / 140A Ins.	0 120 689 545
			0 120 689 557							
0 120 689 564										
0 120 689 531										
0 120 689 545										
0 120 689 557										
0 120 689 564										

IMPORTANT : Ensure alternator cables are adequate to handle the alternator output current.
Voltage drop between Alternator B+ (Output Terminal) and Battery B+ (Positive Terminal) should not exceed 0.5 Volts drop at full alternator output.

For additional cross reference information visit our website e-Cat: www.dixie-electric.com

CANADA & EXPORT SALES

Dixie Electric Ltd. Tel.: 905-879-0533 800-461-5799
 517 Basaltic Road Fax: 905-879-0532
 Concord, ON. E-Mail: sales@dixie-electric.com
 Canada L4K 4W8 Web Site: www.dixie-electric.com



U.S.A. SALES

Dixie Electric Inc. Tel.: 763-475-6629 800-478-0608
 5600 Pioneer Creek Drive, Suite D Fax: 763-475-6635 800-392-8719
 Maple Plain, MN 55359 E-Mail: mn.sales@dixie-electric.com
 U.S.A. Web Site: www.dixie-electric.us