


PERFECT AIR COOLED DROP-IN To Replace CE Niehoff C803D, C840D

- LIGHTER WEIGHT
- SMALLER SIZE
- AIR COOLED
- A PERFECT DROP-IN FOR CE Niehoff C803D, C840D APPLICATIONS
- SIMPLE TO SERVICE, LESS TIME REQUIRED


**28 Volts
525 Amps**

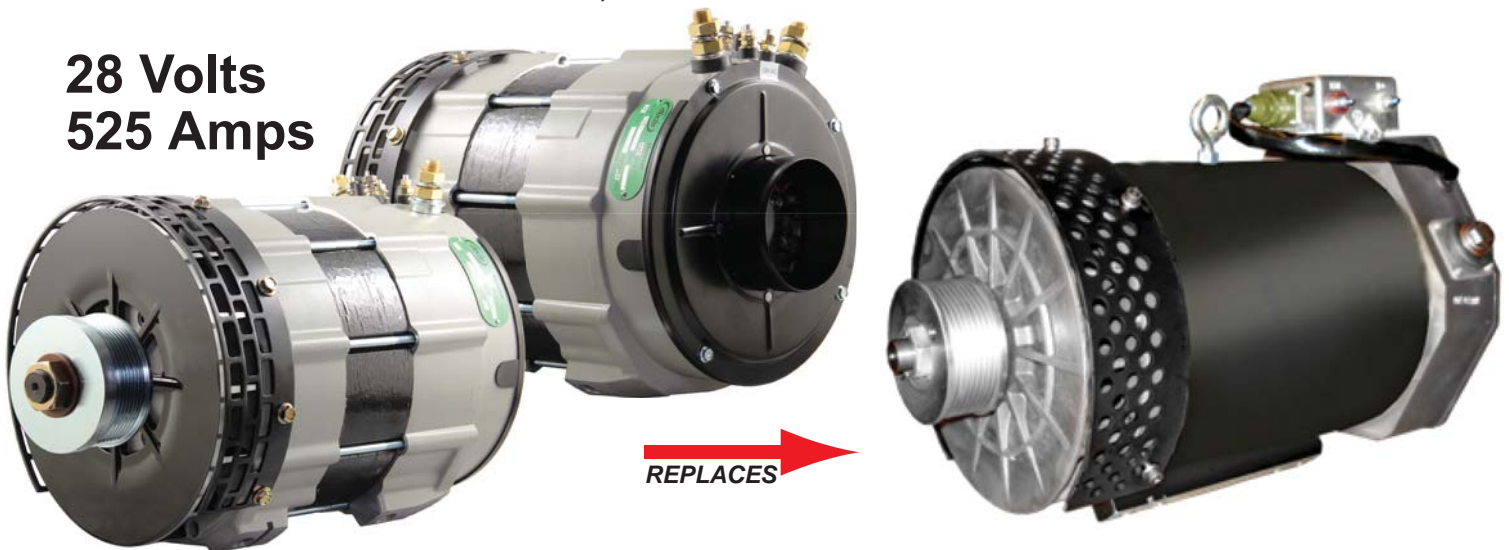

PRODUCT SPECIFICATIONS

Part number	100-412041
System Voltage	24V
Rated Output	525A
Output @ 2000 rpm	335A
Ground	Negative
Mounting	Cradle
Pulley	8-Groove, Ø3.56"
Rotation	Bidirectional
Temperature limits:	
Low	- 40°C / -40°F
High	110°C / 230°F (with fresh air intake)
Speed limits:	
	7000 RPM continuous
	8000 RPM intermittent
Coating	Corrosion-Resistant E-Coated
Weight	94 Lbs / 42.5 Kg.
Regulator	Internal
Excitation	IGN-Excite
Indicator Light (D+)	Yes
Remote Sense	Yes

DELSTAR PERFORMANCE CURVES

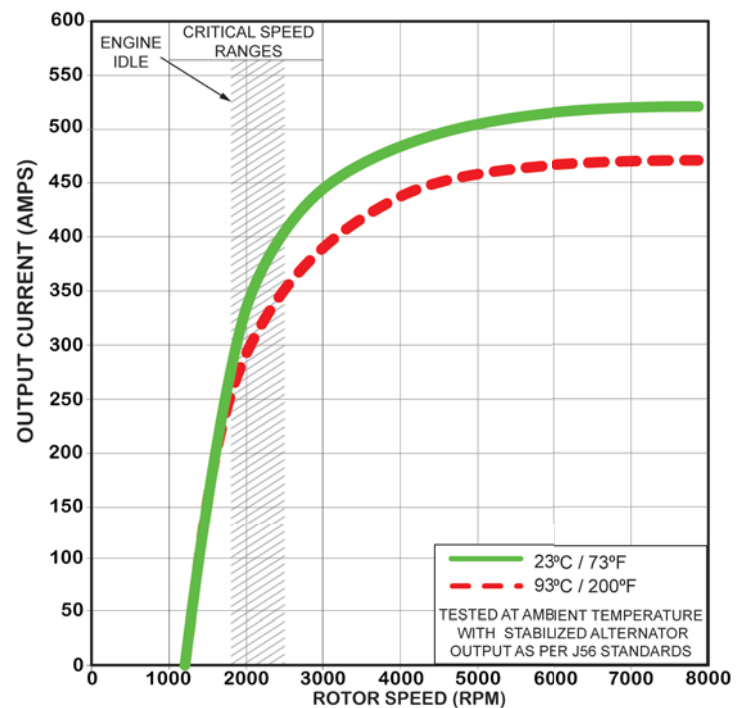

SIDE BY SIDE COMPARISON



SIDE BY SIDE TABLE

DESCRIPTION	DelStar	C803D, C840D
VOLTS	24	24
AMPS OUTPUT	525	525
AMPS @ 2000 rpm	335	320
WEIGHT	94 lbs	110 lbs
LENGTH mm (in)	403.7 (15.89)	467.4 (18.4)
DIAMETER mm (in)	237 (9.30)	241.3 (9.94)
COOLING	AIR	AIR

ACCESSORIES:



8-Groove Clutch Pulley

2400-4001

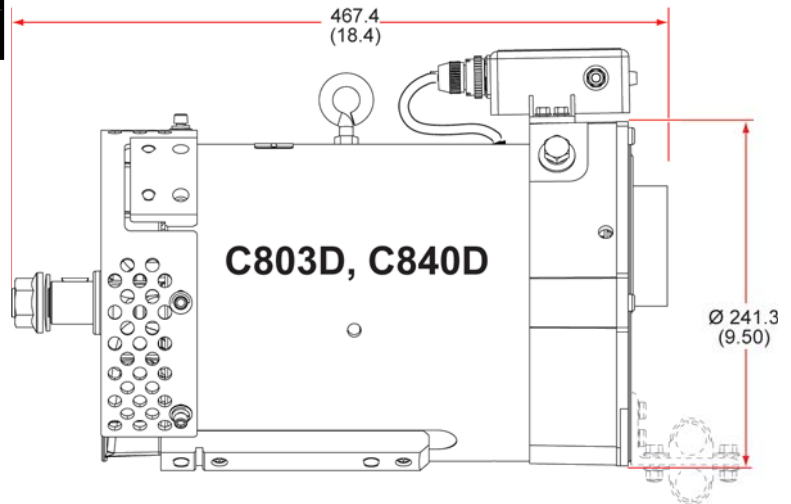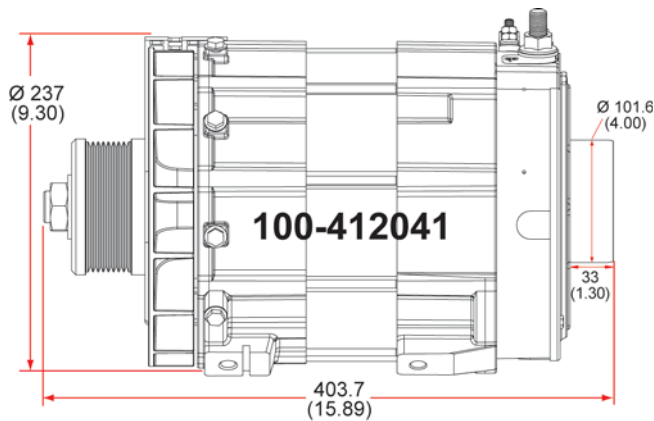

Dimensions are listed in mm over (in)

CONNECTIONS

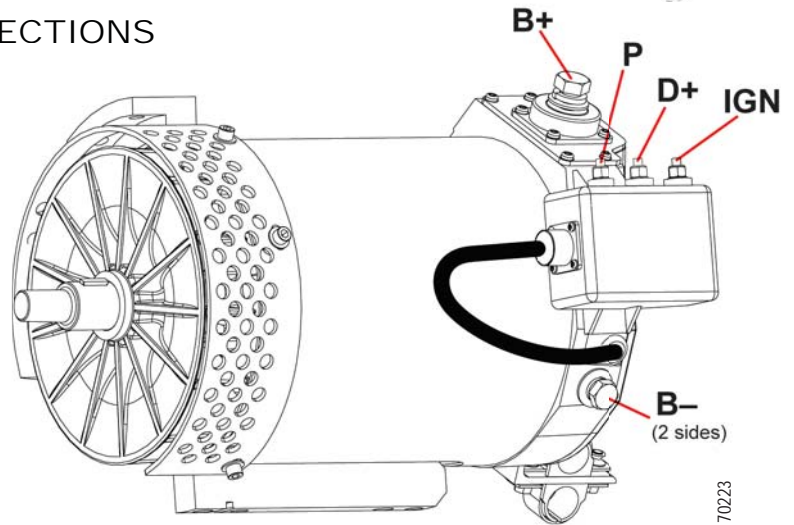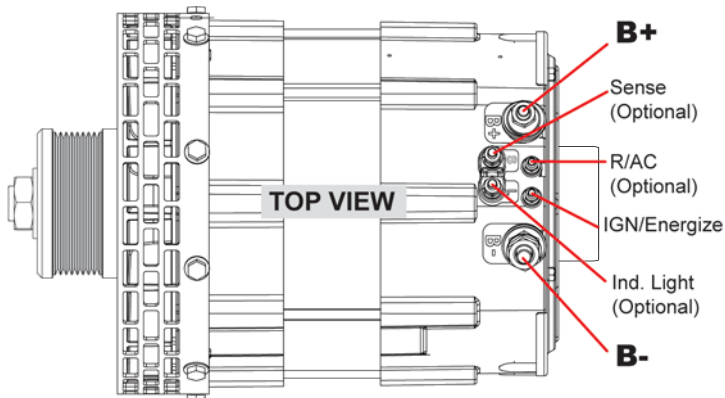

For installation instructions, go to **"SUPPORT"** in our website: www.delstar-hd.com

CANADA & EXPORT SALES

Dixie Electric Ltd.
517 Basaltic Road
Concord, ON.
Canada L4K 4W8
Tel.: 905-879-0533 800-461-5799
Fax: 905-879-0532
E-Mail: sales@dixie-electric.com
Web Site: www.dixie-electric.com



U.S.A. SALES

Dixie Electric Inc.
5600 Pioneer Creek Drive, Suite D
Maple Plain, MN 55359
U.S.A.
Tel.: 763-475-6629 800-478-0608
Fax: 763-475-6635 800-392-8719
E-Mail: mn.sales@dixie-electric.com
Web Site: www.dixie-electric.us

400-SBS-C800 - 170223